

CAMMING SEAM CLAMPS ARE SPECIFIED WITH A BLACK OXIDE S.S. BOLT. IT IS IMPORTANT TO USE THE PROVIDED BOLT AND TO TIGHTEN TO 16 FT-LBS FOR FULL LOAD CAPABILITY



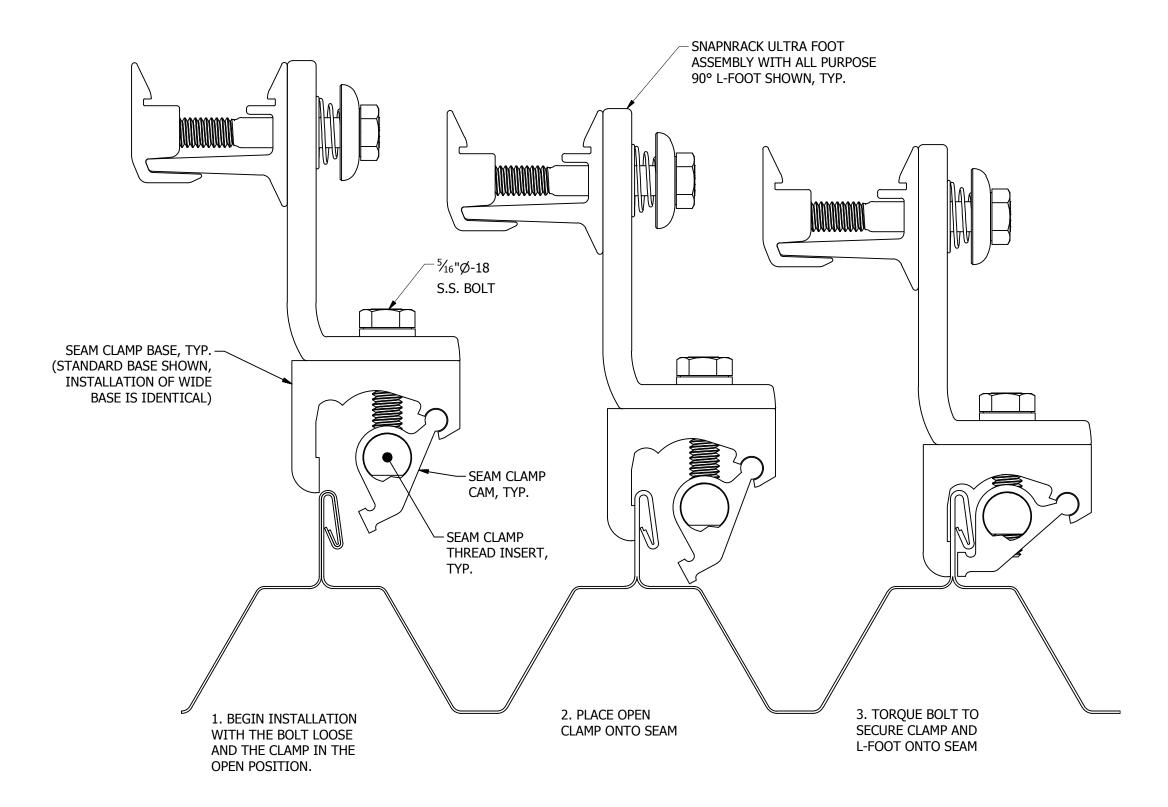

Solar Mounting Solutions

Sunrun South LLC

595 MARKET STREET, 29TH FLOOR • SAN FRANCISCO, CA 94105 USA PHONE (415) 580-6900 • FAX (415) 580-6902

THE INFORMATION IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY. ANY REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PROHIBITED WITHOUT THE WRITTEN CONSENT OF SUNRUN SOUTH LLC.

DESIGNER: G.McPheeters M.Affentranger DRAFTER:

APPROVED BY: G.McPheeters

SCALE: DNS DATE: 10/25/2017 PART NUMBER: UR40-PEN-D04 DESCRIPTION:

UR-40 PENETRATION DETAIL, SEAM CLAMP

REV

Α