Universal Top-of-Pole Mount Selection and Pricing Guide





Selection Guide Instructions:

- Determine the Module Series by matching the dimensions to the size range (left column, below).
- Select number of modules to mount (move across chart)Note UTPM Configuration block, which includes the standard pipe size, layout and price.
- 3. Determine Top-of-Pole Mount part number to order using **Ordering Guidelines Block** (to the right).

Refer to Options page on back for more details.

Prices subject to change without notice.






		Number of Modules					
MODULE SIZE RANGE (W x L)	PLP MODULE Series	4	6	8	10	12	15
37-42" x 61-67"	G	4" Pipe 2hx2w-L	6" Pipe 3hx2w-L	6" Pipe 4hx2w-L	8" Pipe 5hx2w-L	8" Pipe 6hx2w-L	8" Pipe 5hx3w-L

ALL PIPE RECOMMENDATIONS CONFORM TO ASCE 7-05, IBC2006. PIPE SIZE MAY VARY PER YOUR SITE CONDITIONS. PLEASE VISIT WWW.PREFORMED.COM AND DOWNLOAD THE TPM REQUEST FOR INFORMATION FORM, FILL OUT AND SEND TO INFO@PLPSOLAR.COM FOR FOUNDATION AND PIPE RECOMMENDATIONS.

PV Modules without a bottom flange and 1/4" mounting holes cannot be used with UPTM's.

Call for Pricing (800) 260-3792

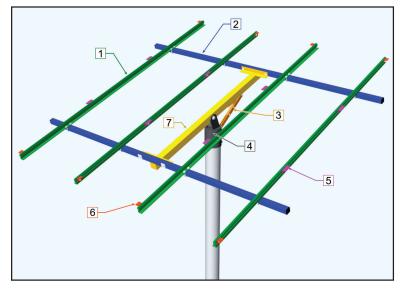

30 psf ground snow load.

Global Headquarters 660 Beta Drive Cleveland, Ohio 44143 USA

Telephone: 800.260.3792 Fax: 440.442.8816 Website: preformed.com Email: info@plpsolar.com

© 2019 Preformed Line Products SL-PL-1008-4 07.19.IH

Main Structural Component

1 Module Rails

2 Cross-Bars

3 Support Bar

4 Mounting Sleeve

5 Double Hole Slide Plate

6 Single Hole Slide Plate

7 Strongback