

ITEM NO.	DESCRIPTION	QTY.
1	CAP SCREW, HEX HEAD, 5/16"-18 X 3/4" UNC-2A, GRADE 8, MAGNI	1
2	QBASE, 1-1/4" ID, FOR 5/16" HARDWARE, A360 CAST AL	1
3	LAG SCREW, HEX HEAD, 5/16" X 3", ZINC	2
4	SUB-FLASHING, CONE, 9"X9"X.020"/.032", 3003 AL, MILL	1
5	FLASHING, CONE, 18"X18"X.032", 3003 AL, MILL	1
6	COLLAR, COUNTER FLASHING, 1-1/4" ID EPDM	1
7	POST, 1.25" OD X 6.5", 6063-T5/6063-T6, MILL	1
8	WASHER, SEALING, 5/16" ID X 1-1/4" OD, EPDM BONDED SS	1
9	CAP SCREW, HEX HEAD, 5/16"-18 X 1" UNC-2A, NYLON PATCH, W/ CAPTIVE WASHER, 1"OD, 18-8 SS	1






NOTES:

- 1 AVAILABLE IN MILL FINISH, AND BRONZE ANODIZED FINISH
- 2 STAINLESS STEEL LAG SCREWS INCLUDED WITH ANODIZED FINISH


Quick Mount PV[®]

TITLE:
QMUTM: QBASE UNIVERSAL TILE MOUNT

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/8 TWO PLACE DECIMAL ±.19 THREE PLACE DECIMAL ±.094	SIZE A	DRAWN BY: RAD	REV 13
	SCALE: 1:5	DATE: 8/9/2019	WEIGHT: 2.27
		SHEET 1 OF 2	

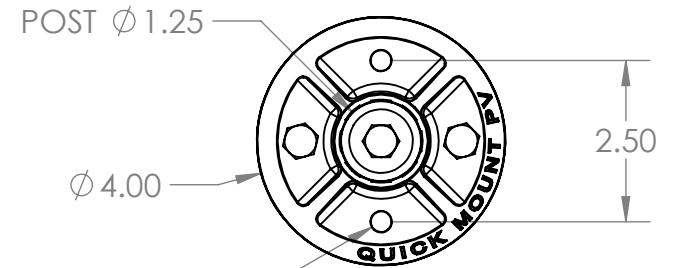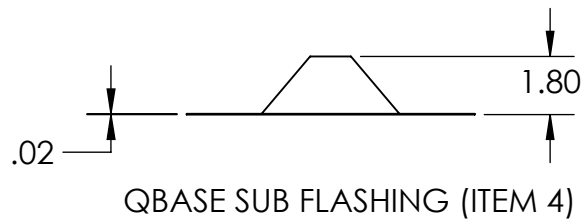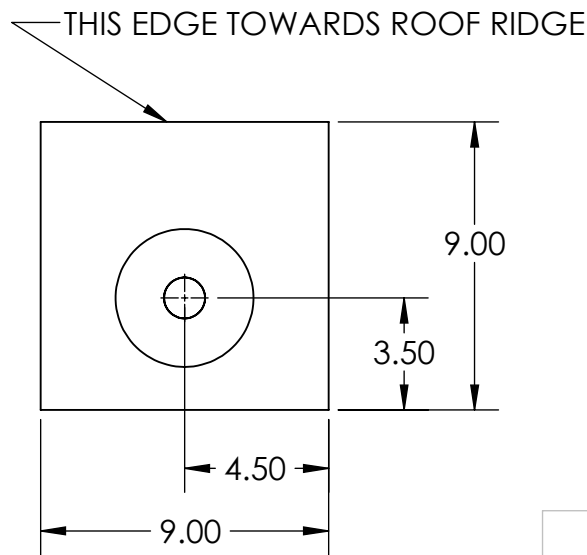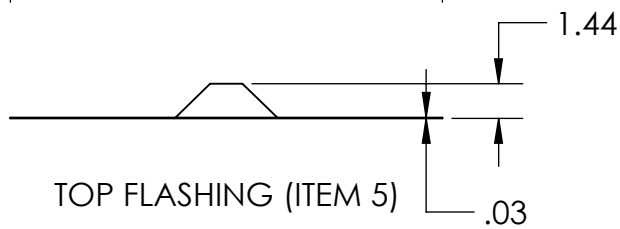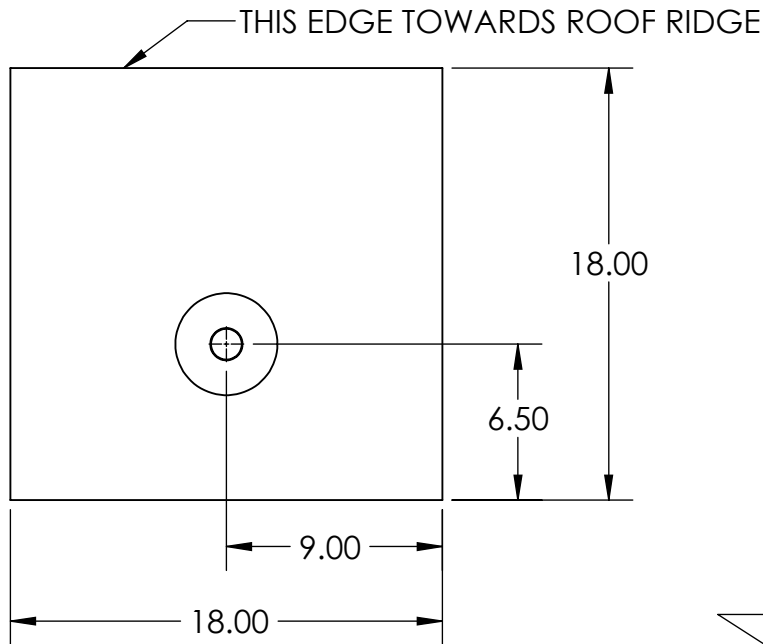

4X Ø .32 THRU (CLEARANCE FOR 5/16" HARDWARE)

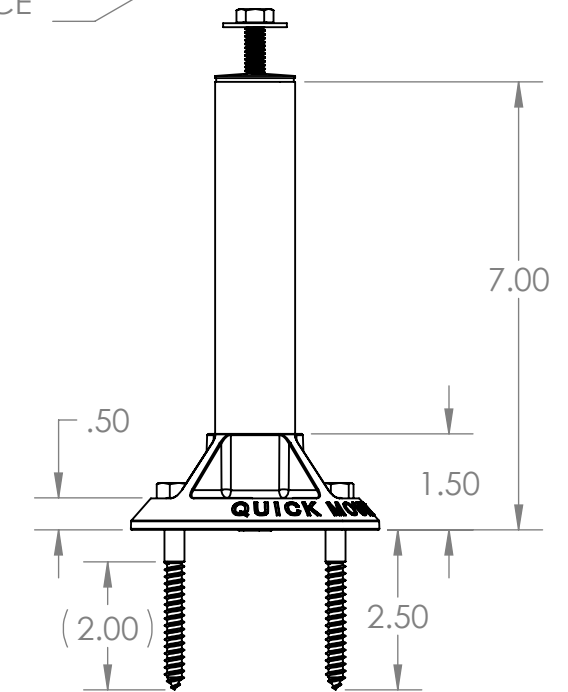

QBASE (ITEM 2) AND POST (ITEM 7)

Quick Mount PV

TITLE:
QMUTM: QBASE UNIVERSAL TILE MOUNT

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ± 1/8
TWO PLACE DECIMAL ± .19
THREE PLACE DECIMAL ± .094

SIZE A	DRAWN BY: RAD	REV 13
	DATE: 8/9/2019	
SCALE: 1:8	WEIGHT: 2.27	SHEET 2 OF 2