


xantrex™ SOLAR

FLEX PANEL DATASHEET

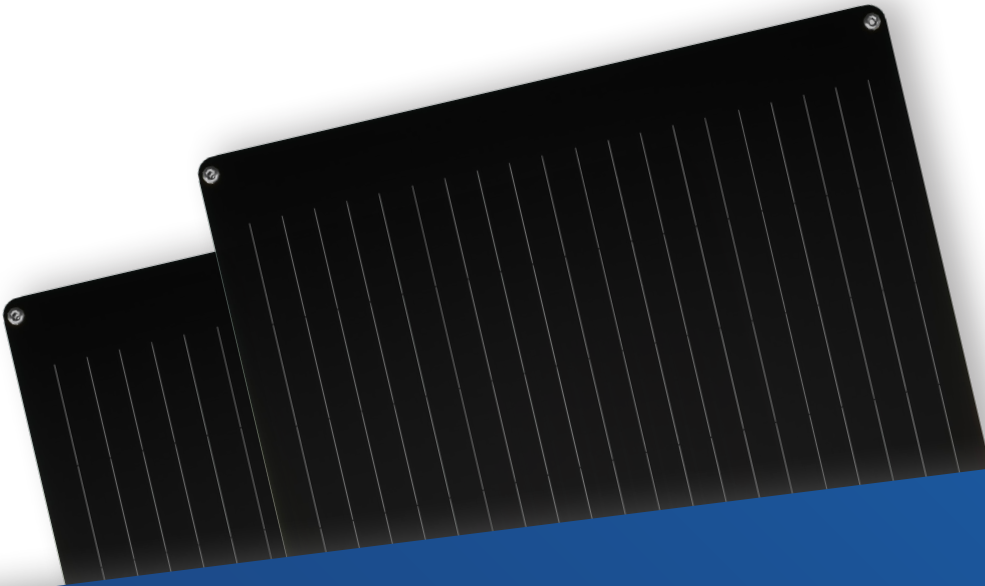

AVAILABLE IN:
110W

FLEXIBLE AND LIGHT, IDEAL FOR CURVED SURFACES

The Xantrex Solar 110W flex panel is lightweight, durable, and perfect for mounting on moderately curved surfaces. The panel features monocrystalline cells with PERC technology that are up to 12% more efficient than conventional solar cells.

Easy-to-install using the six grommet holes provided or applying adhesives to mount the panel.



3X Lighter Compared to Aluminum-Framed Glass Panels



Up to 30° of Flexibility



Durable and Weather-Resistant



Easy-to-Install Using Grommet Holes or Adhesives

APPLICATIONS:



2 YEAR
PRODUCT WARRANTY

www.xantrex.com
CUSTOMER CARE: 1.800.670.0707

2 YEAR
PEAK POWER OUTPUT
WARRANTY



110W Xantrex Solar Flex Panel

COMPLETE YOUR SOLAR SYSTEM



MPPT Charge Controller 30A
710-3024-01



PWM Charge Controller 30A
709-3024-01



Solar & Battery Cable
Starter Kit
708-0150

RECOMMENDED POWER SOLUTIONS

COMPLETE YOUR ELECTRICAL SYSTEM



FREEDOM XC PRO
INVERTER/CHARGER



FREEDOM XC
INVERTER/CHARGER



FREEDOM SW
INVERTER/CHARGER

ELECTRICAL DATA

PANEL TYPE	110W Flex
Part Number	781-0110
Maximum power-Pmax (W) at STC*	110
Maximum power voltage-Vmp (V)	18.9
Maximum power current-Imp (A)	5.83
Open circuit voltage-Voc (V)	23.3
Short-circuit current-Isc (A)	5.95
Maximum system voltage (V)	600
Maximum series fuse rating (A)	20


*Standard Test Conditions (STC): Irradiance: 1000W/m², Cell Temperature: 25°C, Air Mass: 1.5

MECHANICAL DATA

PANEL TYPE	110W Flex
Cell type	Monocrystalline PERC
Top-layer	ETFE
Junction box IP rating	IP68
Connector type	MC4 - type
Number of cells	36 (4 x 9)
Weight	5.7lbs (2.6kg)
Dimensions	39.6in x 26.9in x 0.12in (0.95in thick at junction box) 1005mm x 683mm x 3mm (24mm thick at junction box)

TEMPERATURE DATA

PANEL TYPE	110W Flex
Operating temperature	-40°C to +85°C
Temperature coefficients of Pmax	-0.38%/°C
Temperature coefficients of Voc	-0.36%/°C
Temperature coefficients of Isc	+0.07%/°C

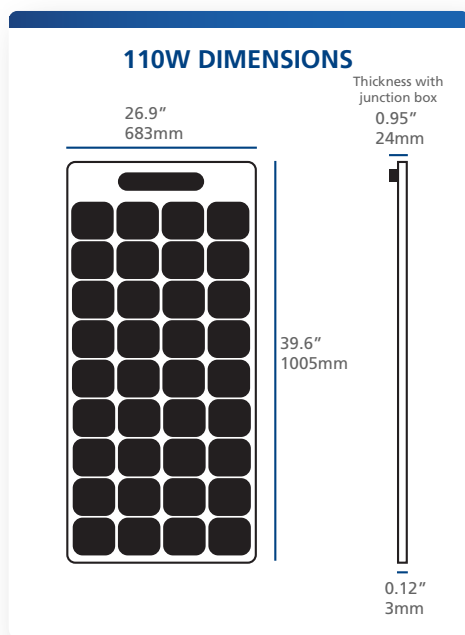

SOLAR FLEX PANELS

Mfg Part #	Description
781-0110	110W Xantrex Solar Flex Panel

CHARGE CONTROLLERS

Mfg Part #	Description
C12	C Series PWM 12A
C35	C Series PWM 35A
C40	C Series PWM 40A
C60	C Series PWM 60A
709-3024-01	Xantrex Solar PWM 30A Charge Controller
710-3024-01	Xantrex Solar MPPT 30A Charge Controller
710-0010	MPPT Remote Panel

ACCESSORIES


Mfg Part #	Description
708-0030	PV Extension Cables (15')
708-0040	PV Single Connector (1 Pair)
708-0050	PV Branch Connector (1 Pair)
708-0060	PV Connector Assembly Tool
708-0080	Remote Battery Temperature Sensor
708-0090	Roof Entry Cable Plate
708-0150	Solar & Battery Cable Starter Kit

CONTACT

CUSTOMER SERVICE

1.800.670.0707
 customerservice@xantrex.com
Hours of operation:
 6:30am - 4:30pm PST, Monday to Friday

 facebook.com/Xantrex

 @Xantrex

 youtube.com/XantrexTechnology

LEARN MORE ON:

www.xantrex.com