


2310310274_1m DC Extension Cable(MC4)



CHANGE NO.	CHANGE CONTENTS	REV.	NAME/DATE
①	Update cable type; Update dimensions	0.1	YFT 2022-9-14
②	Update cable type; change manufactor	1.0	YFT 2022-11-16

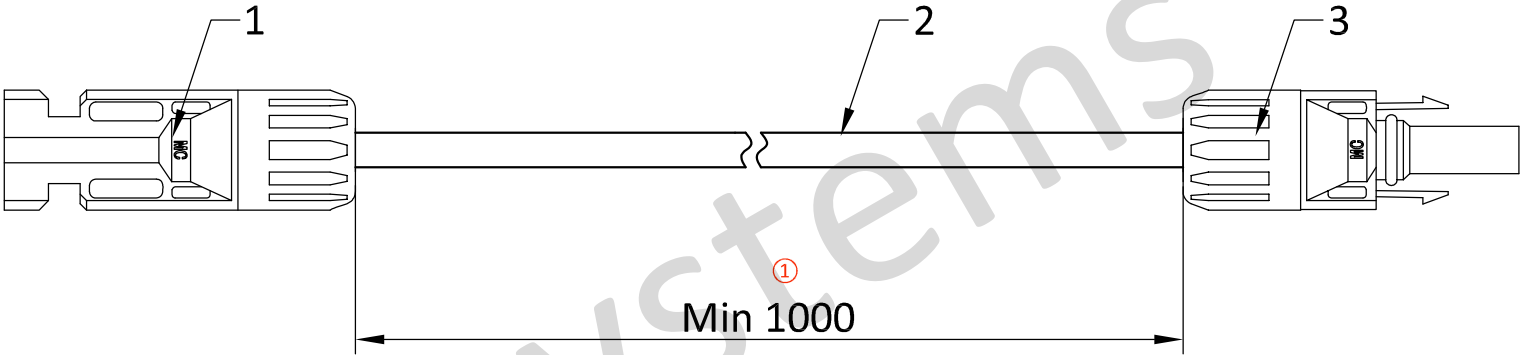

- Notes:
- 1. The DC cable and connector connect firmly, can sustain 100N·60s tension.
 - 2. The pin concentric with plastic parts, ensure that there is no contradict phenomenon when male connector inserts into female connector.
 - 3. Use Blank Cartons For Packaging.

①②

3	DC Connector (female)	MC4 PV-KBT4/6II		1	Female, STAUBLI	
2	DC Cable	H1Z2Z2-K /PV wire		1	4.0mm²/12AWG, TUV/UL certification	
1	DC Connector (male)	MC4 PV-KST4/6II		1	Male, STAUBLI	
NO.	NAME	TYPE	MAT.	QTY.	DESCRIPTION	REMARK
TOLERANCES UNLESS OTHERWISE SPECIFIED		MATERIAL				
>0-100 ±5		>2500-3500 ±45	 NAME 1m DC Extension Cable (MC4)			
>100-500 ±10		>3500-4500 ±50				
>500-900 ±15		>4500-5500 ±65				
>900-1300 ±25		>5500-6500 ±80				
>1300-1800 ±30		>6500-8000 ±90				
>1800-2500 ±35		>8000-10000 ±100				
DWN.		UNIT mm			DRAWING NO.	
CHK.		SHEET --	OF --	REV. 1.0		