



APsysetms Combiner Box


Photovoltaic system dedicated combiner box.

Compatible all ZigBee communication inverters of APSystems.

Introduction

The AP Combiner Box serves as a central hub in a solar energy system, It supports a 120/240 V Split-phase grid and accommodates the necessary AC connections for a APsystems microinverter system.responsible for power distribution, electricity metering, and system communication. It integrates a smart meter for revenue-grade PV production metering accuracy at ±0.5% and Load/Grid metering accuracy at ±1.0%. It is suitable for outdoor installation.

Application Figure

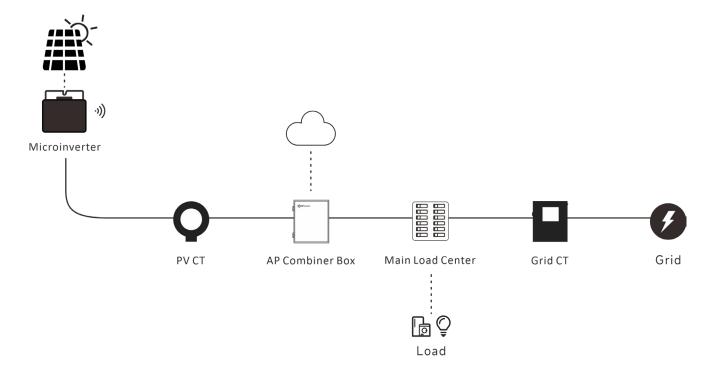

Datasheet | AP Combiner Box

Model Region

AP Combiner Box

USA/Canada

Electrical SpecificationsPV Input

Rating	110 A
System voltage	120/240 VA, 60 Hz
Eaton BR series busbar rating	125 A
Maximum continuous current rating (input from PV)	88 A
Branch circuits (solar)	Supports up to five 2-Pole Eaton BR series DG breakers (not included), such as BR210, BR215, BR220, and BR230.
Maximum total branch circuit breaker rating (input)	110 A
Communication module breaker	10 A (Eaton BR series)
Wire size	20 A to 50 A breaker inputs: 14 to 4 AWG conductors
	Main lug combined output: 10 to 2/0 AWG conductors
	Neutral and Ground: 14 to 6 AWG conductors
	Always follow local code requirements for conductor sizing

Mechanical Data

Dimensions (W × H × D)	19.67 × 15.75 × 7.87 inch. (500 × 400 × 200 mm)
Weight	18.8 lbs. (8.5kg)
Ambient temperature range	-13°F to 122°F (-25°C to 50°C)
Cooling	Natural convection
Enclosure rating	Outdoor, IP65, Polycarbonate Construction
Altitude	Up to 6,562 feet (2, 000 meters)

Interface Layout

