



Monitoring and communications

VSN700 Data Logger

This high-performance VSN700 data management system allows solar customer to connect their commercial, industrial and utility scale photovoltaic systems with the Aurora Vision cloud for enabling condition monitoring and O&M remote cloud services in a very cost effective manner.

This SunSpec compliant datalogger records data and events from inverters, energy meters, weather stations, and other photovoltaic plant devices¹, and acts as an Internet gateway to send the data securely and reliably to the Aurora Vision Plant Management Platform for performance monitoring, condition monitoring and data reporting.

VSN700-01/VSN700-03/VSN700-05

Three performance levels

The VSN700 Data Logger is available in three performance levels to fit anyone's budget and functionality:

VSN700-01 Data Logger is available to those residential customers who only need to monitor up to five (5) single-phase inverters¹.

VSN700-03 Data Logger is a cost-optimized logger for small commercial installations with up to ten (10) single and three-phase string inverters¹ and one weather station (VSN800 Weather Station).

VSN700-05 Data Logger provides both customer data management and inverter command and control for commercial and utility PV system operation, as well as SCADA integration.


Highlights

- All VSN700 Data Logger models
- include:
- Data management system with serial and Ethernet ports for data and event logging
- Quick installation and fast plug and play commissioning with device discovery mechanism
- Network Provisioning with dynamic IP addressing (DHCP client and server)
- Reliable and secure transmission of operational data to Aurora Vision Plant Management Platform
- Remote configuration and management capabilities, including firmware upgrades over the Internet using Plant Portfolio Manager
- Simple end-user UI using Plant Viewer

VSN700-05 Data Logger (Max) includes the following additional functionalities:

- No software limitation on number of devices logged
- Modbus TCP server using SunSpec compliant Modbus maps for easy SCADA system integration, data collection, and inverter command execution
- Support for most FIMER inverters, meters, smart combiners and weather stations¹

Commercial and utility application with VSN700-05

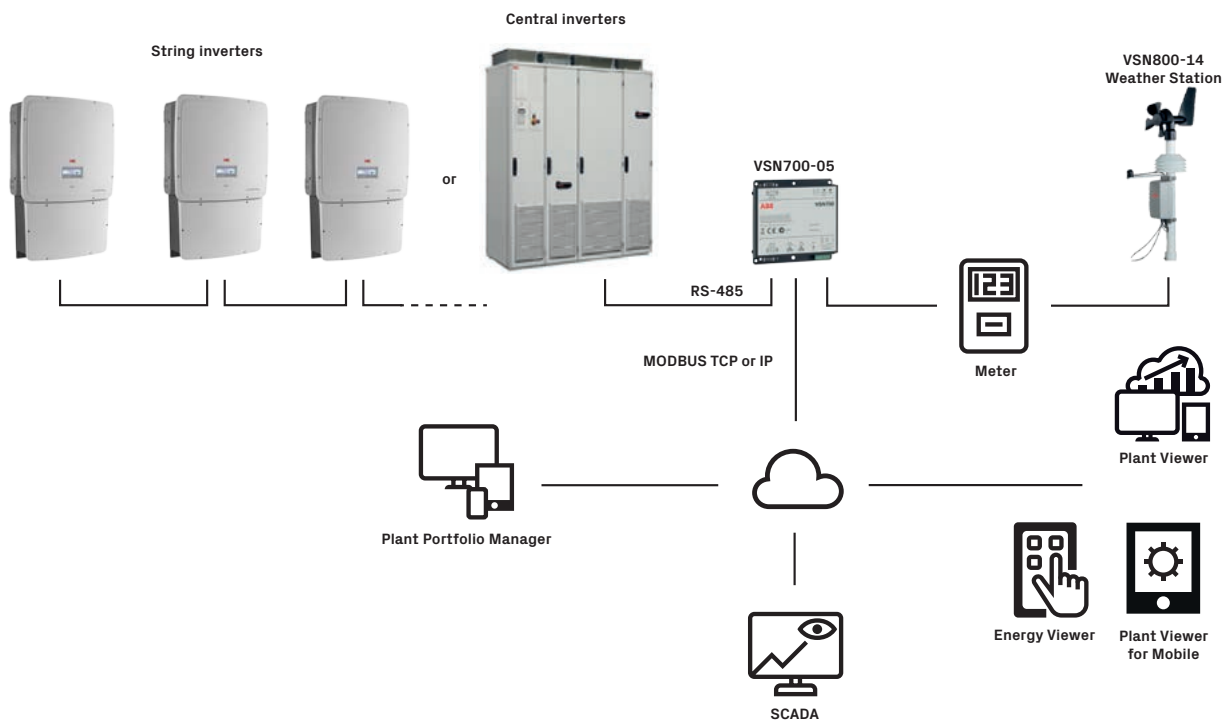

Technical data and types

Type code	VSN700 Data Logger
Communication interfaces	
Serial port interface	(2) RS-485 + (2) RS-232
Maximum devices per serial port	Physical limitation of 32 (reduced by poll rate, inverter data set size and logger type)
Fieldbus cable	RS-485 Shielded Twisted Pair. Recommend Belden # 1120A cable or # 3106A for 3 conductors
Ethernet port 0	Firewall protected Ethernet WAN port for Internet connection
Ethernet port 1	Local LAN with static IP address
Ethernet connections	RJ-45 Ethernet 10/100 base-T (LAN/WAN)
Communication protocols	
Plant fieldbus protocols	Aurora Protocol, Modbus RTU (SunSpec)
LAN/WAN protocols	HTTP, DHCP, SSL, SSH, XML
Data logging specifications	
Data sampling rate	High frequency data sampling (less than 1 minute average)
Local storage	Log data for 30 days based on 15-minute intervals (Days logged may be reduced by intervals shorter than 7 minutes)
Upgradeability	Field upgradable over the Internet or locally via USB memory stick
Power supply	
AC power supply input	100 - 240 VAC
DC power supply output	12 VDC, 1 A
Environmental parameters	
Ambient temperature range	Logger only -40°F to 185°F (-40°C to 85°C); power supply 32°F -104°F (0°C-40°C)
Environmental protection	IP20
Relative humidity	< 85% Non-condensing
Mechanical parameters (per unit)	
Dimensions (H x W x D)	133 mm x 132 mm x 31 mm (5,2" x 5,1" x 1,2")
Weight	0.91 kg (2 lbs)
Mounting system	Screws through flanges
Warranty	
Standard warranty	Two years
Accessories	
VSN-MGR-DIN	Din rail mount kit to mount logger on a din rail
VSN800-12	Weather Station with sensors: ambient temperature, panel temperature, global irradiance
VSN800-14	Weather Station with sensors: ambient temperature, panel temperature, global irradiance, plane of array irradiance, wind speed and direction
Compliance	
Emissions	FCC Part 15 Class B, CISPR 22, EN 55022 conducted and radiated emission, EN55024

VSN700 Data Logger model comparison

Type code	VSN700-01	VSN700-03	VSN700-05
Logging real-time power values	15-minute intervals only	1, 3, 5, 15 minute configurable intervals	1, 3, 5, 15 minute configurable intervals
Modbus/TCP server	No	No	Yes
Inverter control commands	No	No	Yes
Devices supported	5 x FIMER single-phase inverters ¹⁾	10 x all FIMER string inverters ¹⁾ 1 x VSN800-XX Weather Station	All FIMER inverters ¹⁾ Other FIMER devices and third-party devices (Consult latest supported list)

1) Please refer to the document "Accessories compatibility matrix" available at www.fimer.com for information on the compatible models and/or devices.

Remark. Features not specifically listed in the present data sheet are not included in the product

VSN700 Data Logger Accessories

VSN-MGR-DIN

Din rail kit to mount logger on a din rail



VSN800-12

Weather station with sensors: ambient, panel, global irradiance




VSN800-14

Weather station with sensors: ambient, panel, global irradiance, plane of array irradiance, wind speed and direction



Residential application with VSN700-01

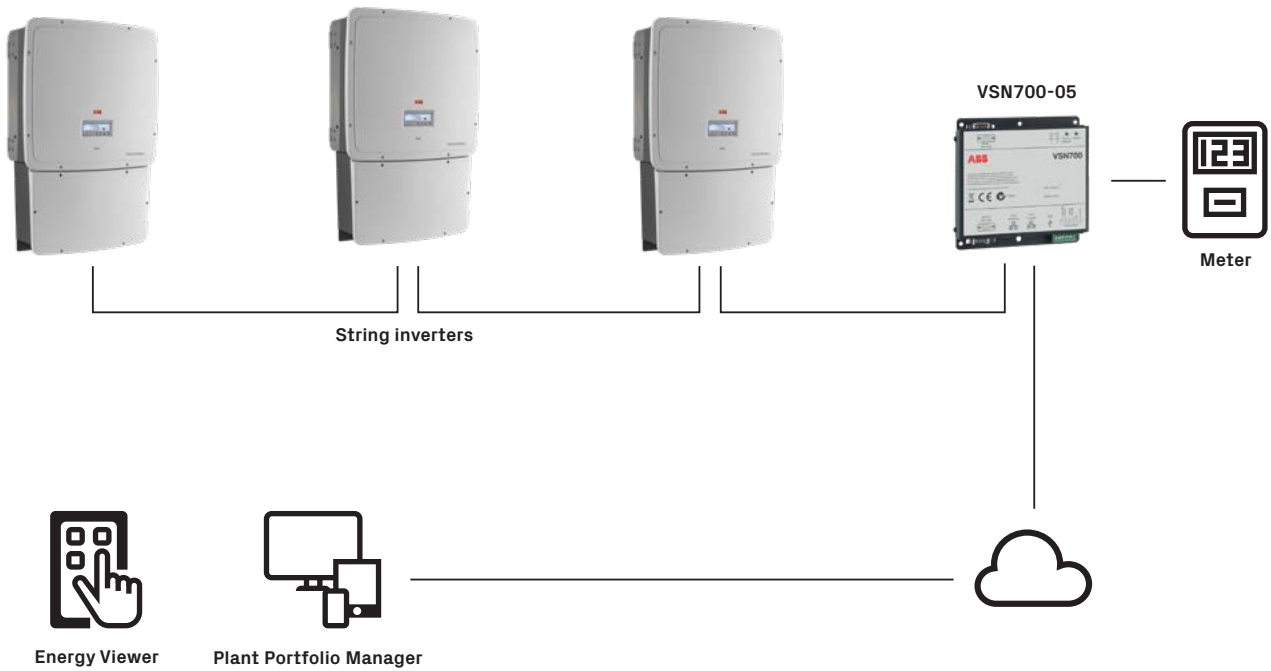

For more information please contact your local FIMER representative or visit:

fimer.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. FIMER does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of FIMER. Copyright© 2020 FIMER. All rights reserved.

