

Side-of-Pole Mount (SPM) Selection Guide



<p>Selection Guide Instructions:</p> <ol style="list-style-type: none"> Determine Module Series by matching dimensions to size range (left column, below) Select number of modules to mount (move across chart) Note - SPM Configuration block, which includes the pole size, layout and price. Determine Side of Pole Mount part number to order using Ordering Guidelines Block (to the right). Refer to Options page on back for more details. 	<p>Ordering Guideline SPM4-D-HWV-AA</p> <p>*Important: Include module manufacturer's specification sheet with PO</p>	<p>SPM Configuration Key</p> <p>3-4.5" OD ← Outside Diameter (OD) Range of Mounting Pipe</p> <p>4h x 1w-L ← Array Layout and Module Orientation (P=Portrait, L=Landscape)</p> <p>Based on standard design – 90 mph, Exposure C.</p>
--	---	---

MODULE SIZE RANGE (W x L)	PLP MODULE Series	Number of Modules			
		1	2	3	4
19-23" x 35-44"	A	2-3.5" OD 1h x 1w-L	2-3.5" OD 2h x 1w-L	N/A	N/A
20-26" x 39-53"	B	2-3.5" OD 1h x 1w-L	2-3.5" OD 2h x 1w-L	3-4.5" OD 3h x 1w-L	3-4.5" OD 4h x 1w-L
22-27" x 56-63"	C	2-3.5" OD 1h x 1w-L	2-3.5" OD 2h x 1w-L	3-4.5" OD 3h x 1w-L	3-4.5" OD 4h x 1w-L
31-33" x 60-67"	D	2-3.5" OD 1h x 1w-L	3-4.5" OD 2h x 1w-L	3-4.5" OD 3h x 1w-L	3-4.5" OD 4h x 1w-L
38-40" x 51-56"	E	2-3.5" OD 1h x 1w-L	3-4.5" OD 2h x 1w-L	3-4.5" OD 3h x 1w-L	N/A
38-42" x 58-61"	F	2-3.5" OD 1h x 1w-L	3-4.5" OD 2h x 1w-L	3-4.5" OD 3h x 1w-L	N/A
37-42" x 61-67"	G	2-3.5" OD 1h x 1w-L	3-4.5" OD 2h x 1w-L	3-4.5" OD 3h x 1w-L	N/A
38-40" x 77-78"	H	2-3.5" OD 1h x 1w-L	3-4.5" OD 2h x 1w-L	3-4.5" OD 3h x 1w-L	N/A
50-52" x 65-79"	I	2-3.5" OD 1h x 1w-L	3-4.5" OD 2h x 1w-L	N/A	N/A


Side-of-Pole Mount Options Selection Guide (SPM)

Instructions: Add Options to the end of SPM part number in the order listed below

Part Suffix	Description
HWV	High Wind Version
TRH	Tamper Resistant Hardware for Module Mounting
PCA	Powder Coated Aluminum Components
AA	Anodized Aluminum Components
12IN	Band Clamp upgrade for 6 - 12" OD pipe
6IN	Band Clamp upgrade for 2 - 6" OD pipe

Ordering Guideline

SPM4-D-HWV-AA

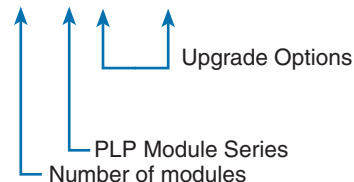

***Important:** Include module manufacturer's specification sheet with PO

HWV High Wind Version for 130 MPH, Exposure C Wind Zone

Finish Upgrades	
PCA	Powder Coated Aluminum Components
AA	Anodized Aluminum Components

TRH Tamper Resistant Hardware for Module Mounting - TRH Package includes stainless steel pin-in-hex machine screws with nylon-insert lock nuts and matching hex-key

Stainless Steel Hardware is now standard.

Band Clamp Upgrades			
Standard OD Range of Mounting Pipe	3 - 6"		6 - 12"
	2-3.5"	6IN	12IN
	3-4.5"	6IN	12IN



Global Headquarters
660 Beta Drive
Cleveland, Ohio 44143 USA

Telephone: 800.260.3792
Fax: 440.442.8816
Website: preformed.com
Email: info@plpsolar.com

© 2020 Preformed Line Products
SL-PL-1001-5
04.20.IH