




DESCRIPTION: SNAPNRACK, TDS, OMNILUG, (USA)		DOC NUMBER: SNR-DC-01459		<div>SnapNrack<sup>®</sup></div>
		DRAWN BY: D.RYAN		
PART NUMBER(S):  242-10034-USA		REV:  B	DATE:  4/3/2025	
UNITS: IN, LB, DEG [MM, KG, DEG]	SHEET: 1:1	SNR SOLAR LLC 775 FIERO LANE, SUITE 200 SAN LUIS OBISPO, CA 93401 USA EMAIL: CONTACT@SNAPNRACK.COM <small>THE INFORMATION IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY. ANY REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PROHIBITED WITHOUT THE WRITTEN CONSENT OF SUNRUN SOUTH LLC.</small>		

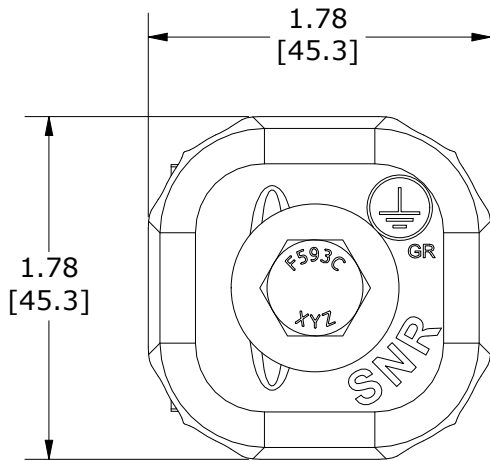


TOP VIEW

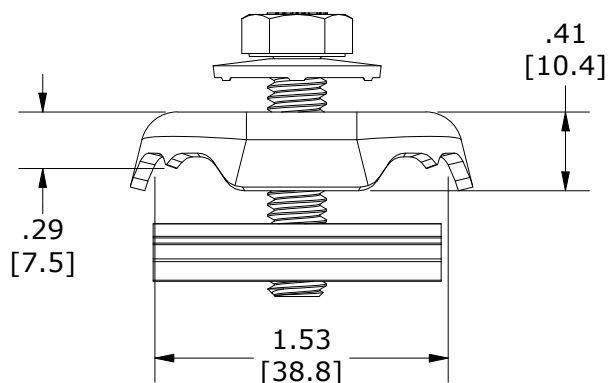

SIDE VIEW

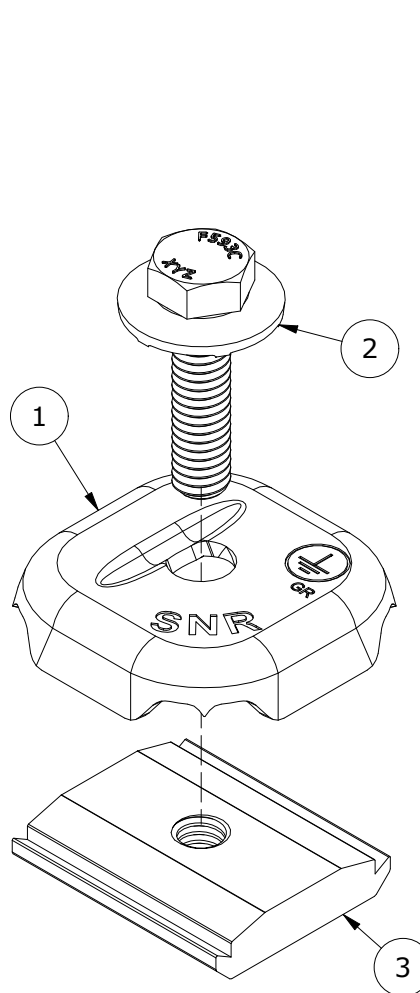

EXPLODED VIEW

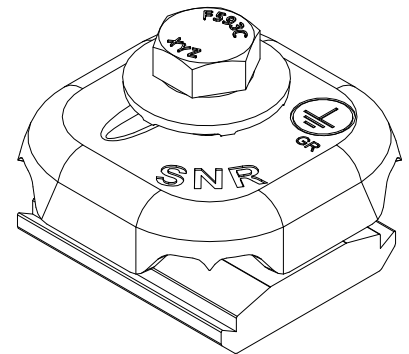

ASSEMBLED VIEW

PARTS LIST		
ITEM	QTY	DESCRIPTION
1	1	SNAPNRACK, OMNILUG, BONDING BRACKET, SS
2	1	SEMS SCREW, HEX, 5-16IN-18 X 1-1-4IN, 7-8 OD CONICAL WSH, TOOTH, SS
3	1	SNAPNRACK CHANNEL NUT 5-16IN-18

MATERIALS:	300 SERIES STAINLESS, 6005 AL	OPTIONS:
DESIGN LOAD (LBS):	N/A	SOLID WIRE GAUGE RANGE: 6-12 AWG
ULTIMATE LOAD (LBS):	N/A	STRANDED WIRE GAUGE RANGE: 8-10 AWG
TORQUE SPECIFICATION:	130 IN-LB	
CERTIFICATION:	UL 467 COMPLIANT, UL 2703 LST.	
WEIGHT (LBS):	0.17	