

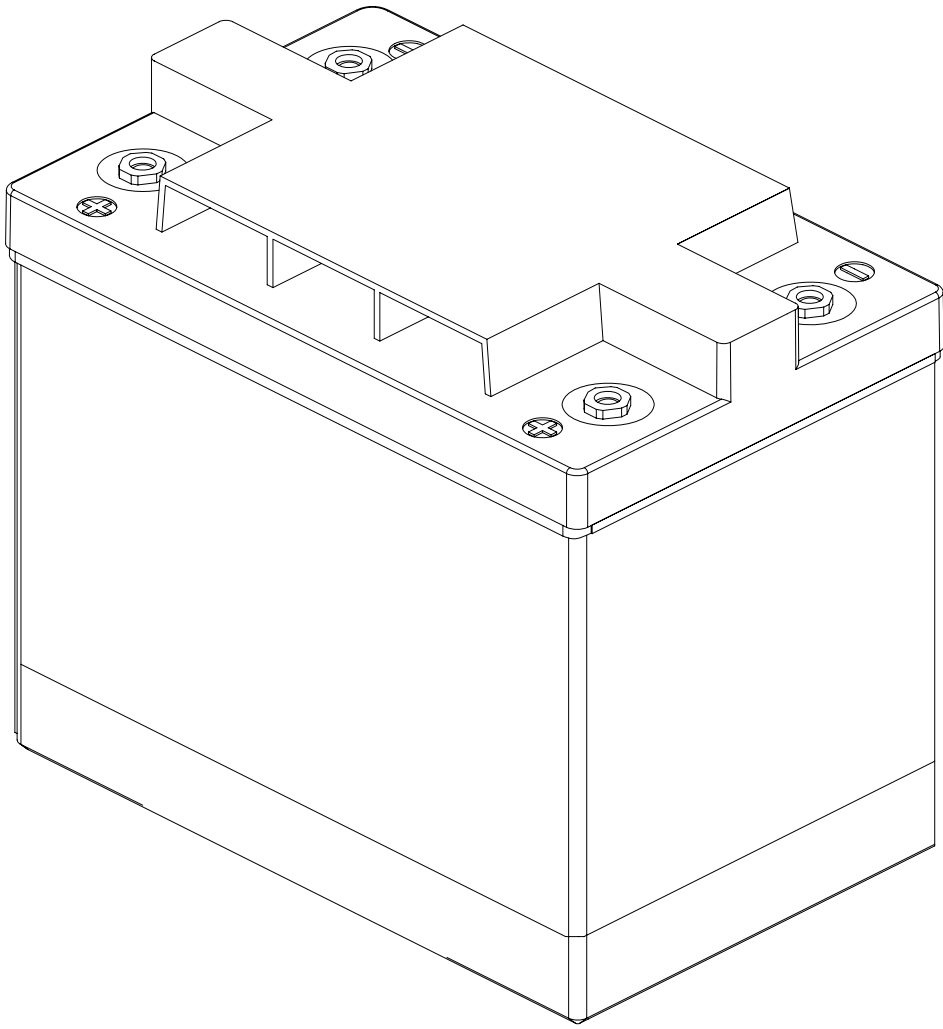
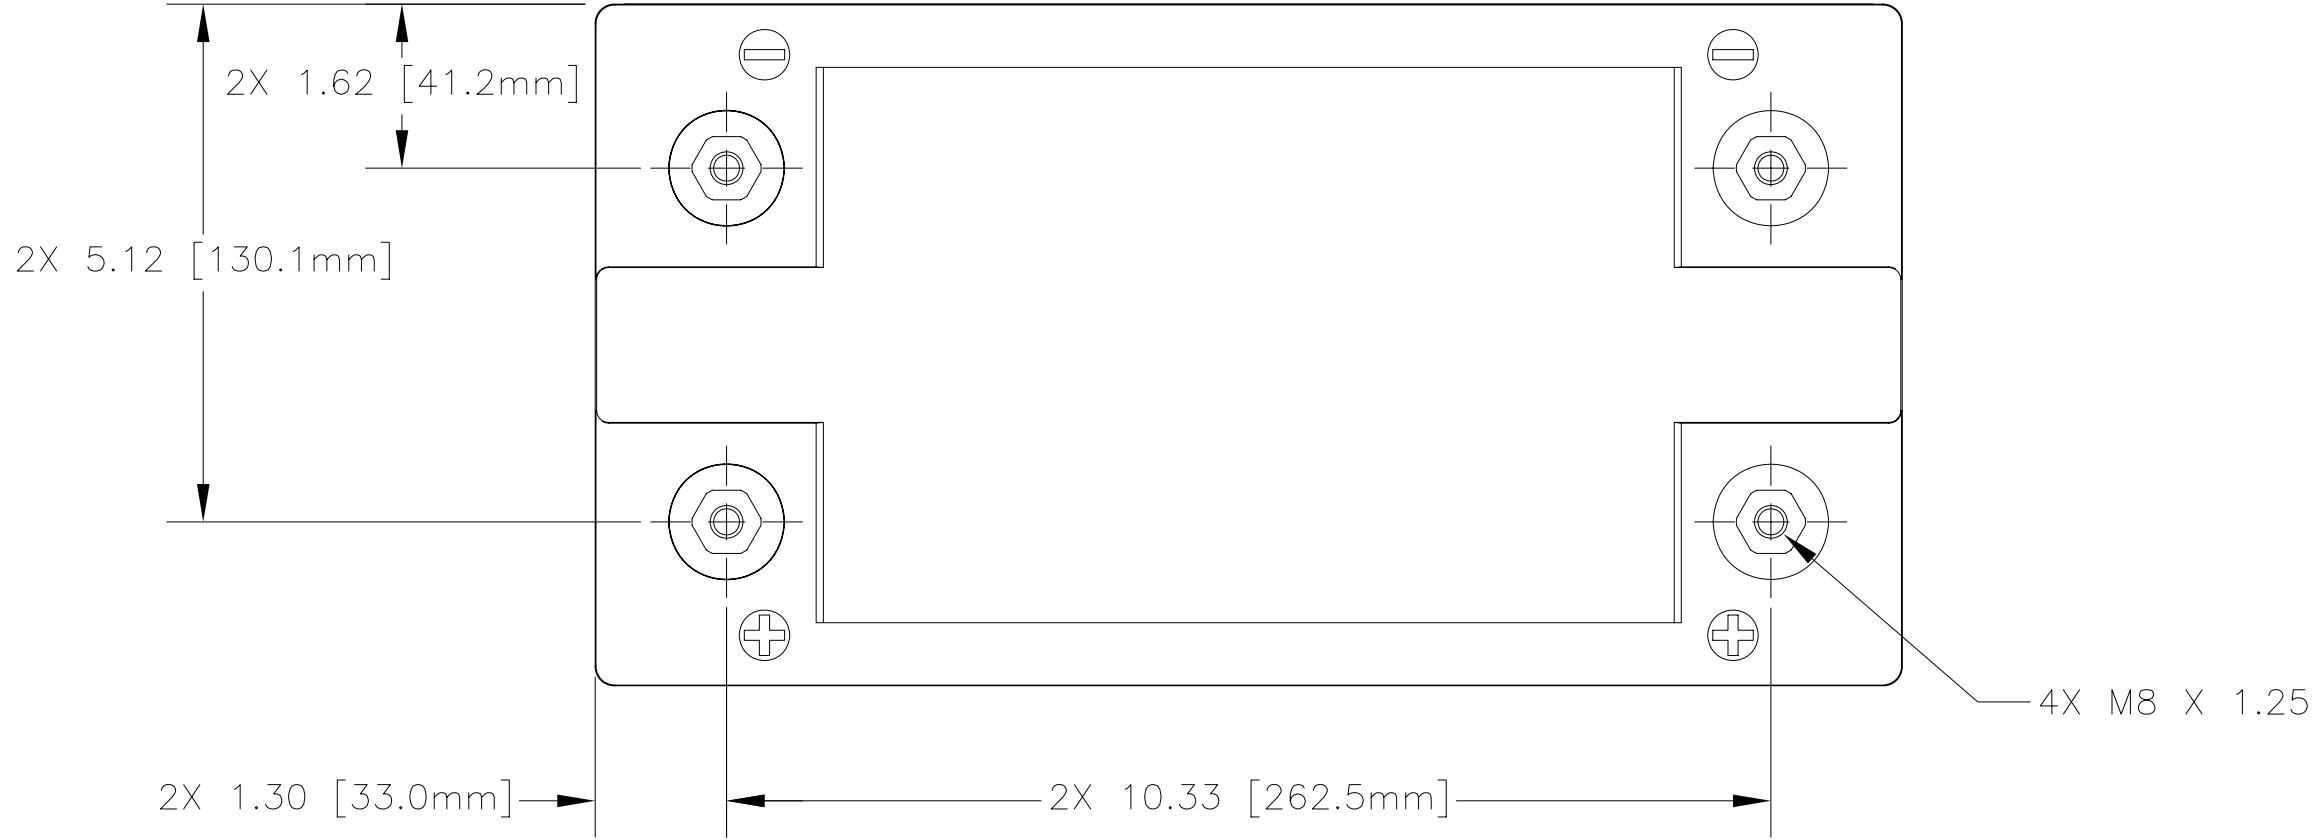


- NOTES: UNLESS OTHERWISE SPECIFIED
- 1. SEE DRAWING NO. CB-00292 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
 - 2. ALL TESTING IS PERFORMED IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
 - 3. ALL DIMENSIONS ARE INCH [MM].
 - 4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	SEE DCN PVX6480TB	8/10/11	JBT

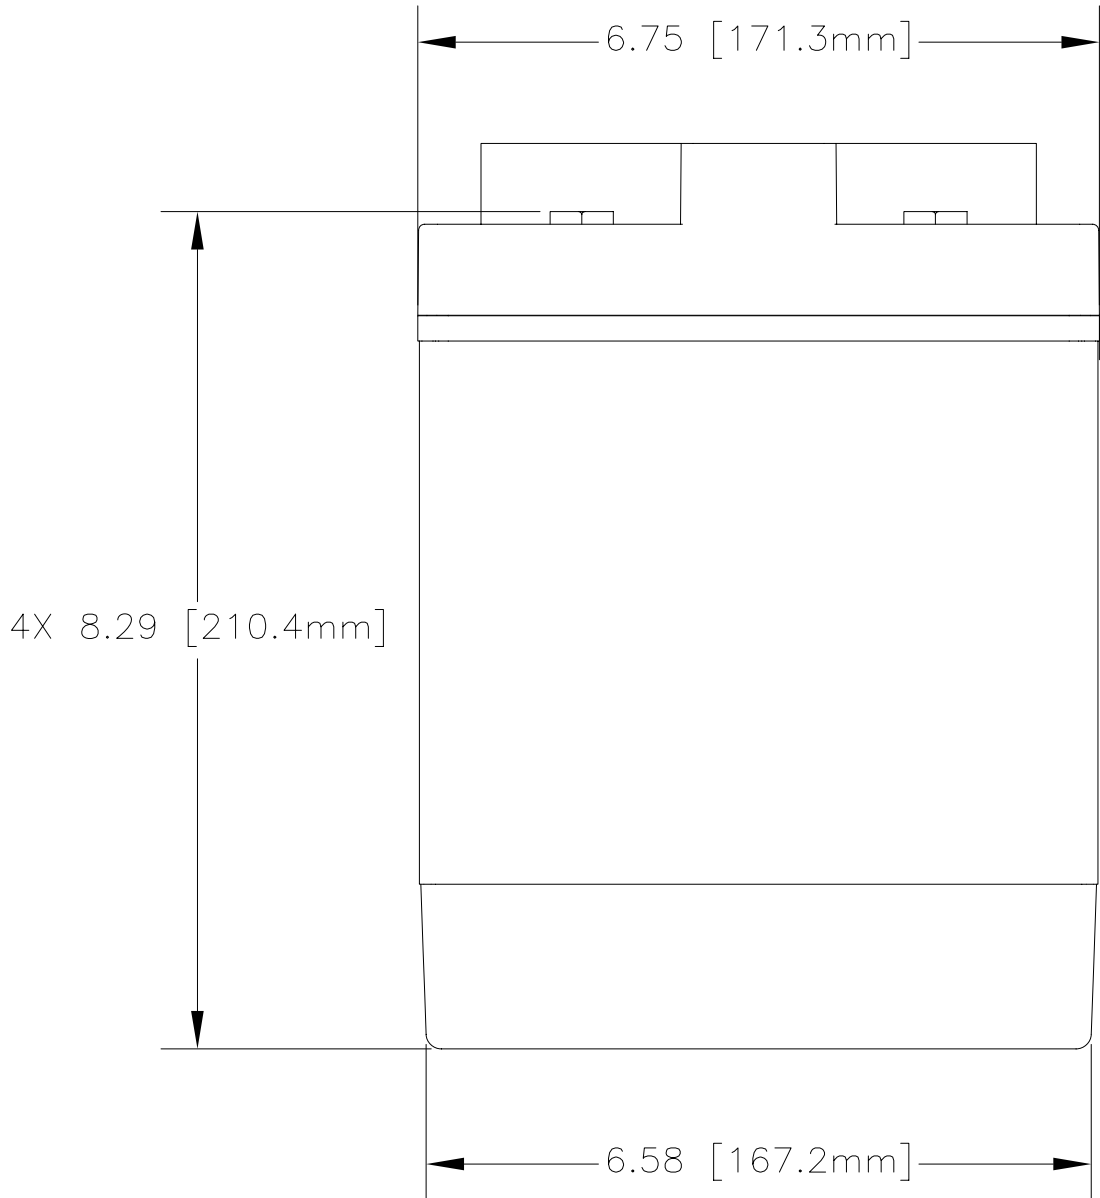

REFERENCE VIEW

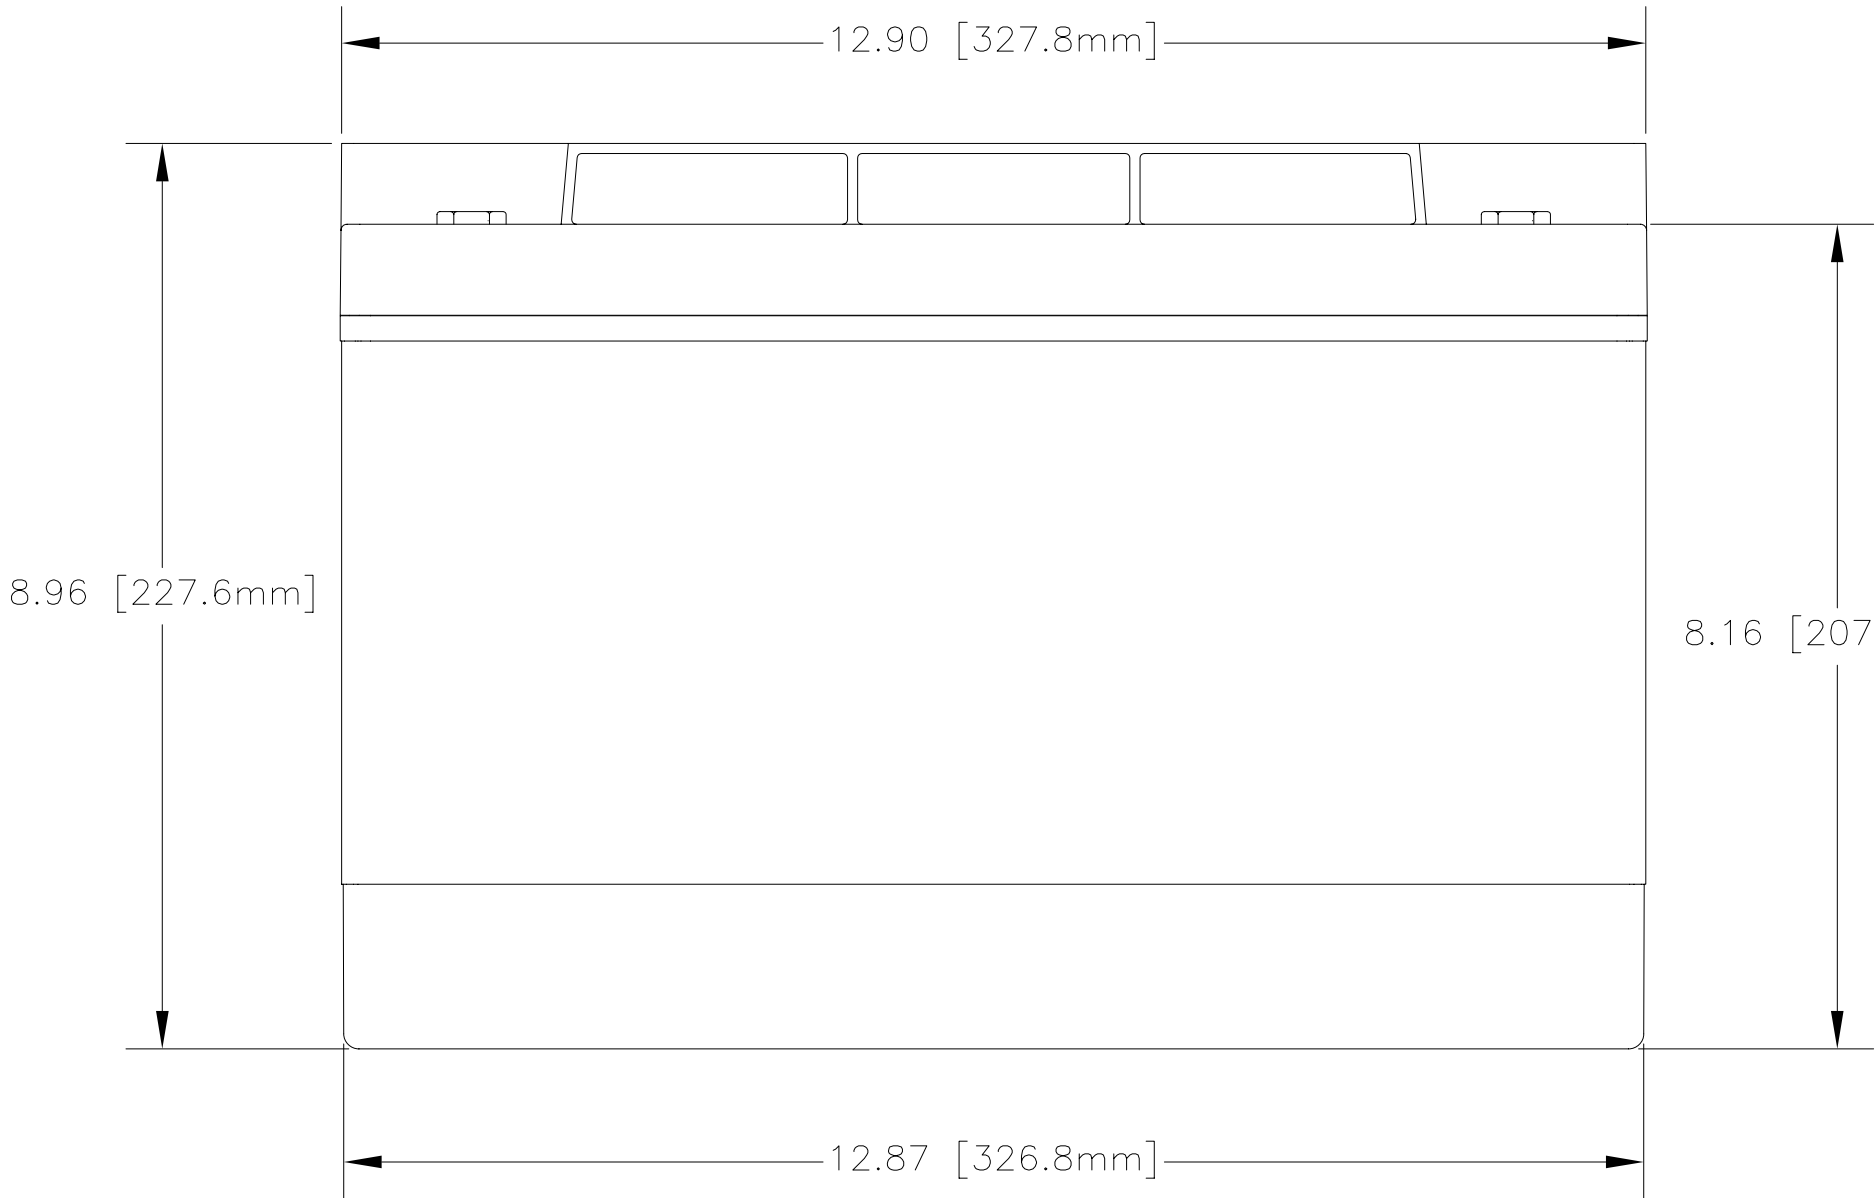

ENVELOPE DRAWING

CAPACITY RATE		
PART NUMBER	PVX-5340T	PVX-6480T
NOMINAL WEIGHT	64 LBS [29 KG]	67 LBS [30.5 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25°C)	534 AH	648 AH

		CAGE CODE	PART OR IDENTIFYING NO.		NOMENCLATURE OR DESCRIPTION			MATERIAL SPECIFICATION		ITEM NO.
QTY REQD		PARTS LIST								
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± 1/32 .XX ± .06 ± 1° .XXX ± .030			CONTRACT NO.		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790					
			APPROVALS		DATE	TITLE BATTERY, SLA, 2 VOLT, PVX-6480T SERIES				
			DRAWN	ELH	8/13/01					
			TREATMENT		NONE	CHECKED	HRF	8/21/01	SIZE	CAGE CODE
FINISH		NONE	APPROVED	JBT	8/23/01	C	63017	PVX-6480T	B	
SIMILAR TO		ACT WT	CALC WT	ISSUED	JJ	8/12/11	SCALE	NONE	SHEET 1 OF 1	