


# MLI Ultra 24/6000

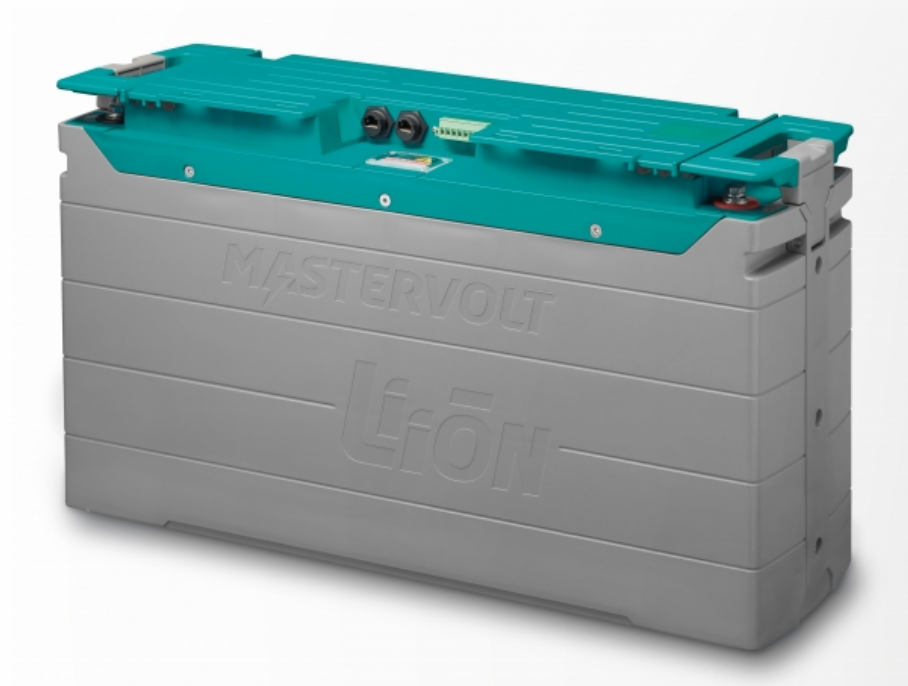

Product code: 66026000

## Heavy Duty, Ultimate Performance

The MLI series delivers ultimate Lithium-Ion performance even under the harshest conditions, such as high charge and discharge currents, wet environments, mechanical shocks or vibrations. This is realized by combining our best Lithium-Ion Phosphate (LiFePO4) cells with a proprietary Battery Management System (BMS) inside a sturdy, waterproof housing.

The sophisticated Mastervolt BMS ensures optimal use of each individual cell. Integrated battery monitoring provides you with accurate and up-to-date information on the state of your battery. Integrated NMEA 2000, CZone or MasterBus communication allows complete system integration, to ensure the best possible recharging, while maximizing the lifetime of your battery.

## Self-learning balancing algorithm

The MLI Ultra batteries are equipped with a self-learning balancing algorithm that predicts the behavior of each individual battery cell and balances proactively, resulting in a faster and more efficient charge cycle. The self-learning system eliminates unnecessary stress on the cells, resulting in an even longer Battery Cycle Life.

## Features

- Ultimate performance, heavy duty Lithium-Ion batteries.
- BMS and LiFePO4 chemistry according to highest safety standards.
- Saves up to 70 % in space and weight.
- More than three times the life span of traditional batteries.
- Fast charging within 60 minutes.
- Self-learning balancing algorithm for optimized performance and longer battery lifetime.
- High charge / discharge rate up to 2.5 C.
- Integrated battery monitoring (Ah consumed, state of charge).
- Series connection up to 10 batteries possible.
- MasterBus communication with any Mastervolt battery charger.
- CZone and NMEA 2000 compatible.
- Waterproof electronics compartment.
- Designed according to UN38.3.
- CE, E-Mark certified.

### CAUTION!

For additional safety, Mastervolt stipulates the use of a safety relay as mandatory part of the battery installation.

- Safety relay 24 volt, product code [7702B-BSS](#)7702B-BSS

# Specifications

## General specifications

|                                                                 |                                                                     |
|-----------------------------------------------------------------|---------------------------------------------------------------------|
| Recommended Continuous Discharge Current                        | <= 200 A                                                            |
| Maximum discharge current (20 mins @ 25 °C)                     | 500 A                                                               |
| Nominal battery voltage                                         | 24 V                                                                |
| Nominal battery capacity                                        | 230 Ah                                                              |
| Nominal battery energy capacity                                 | 6000                                                                |
| Cycle life                                                      | 3500 cycles at 80 % DOD at 25 °C, max. C/3 charge and C/2 discharge |
| Max. charge current                                             | 230 A                                                               |
| Recommended charge current                                      | <= 80 A                                                             |
| Max. continuous discharge current                               | 200 A                                                               |
| Peak discharge current                                          | 1800 A (10 sec.)                                                    |
| Battery monitoring                                              | integrated                                                          |
| MasterBus communication                                         | Yes                                                                 |
| CZone / NMEA 2000 communication                                 | Yes                                                                 |
| Terminals                                                       | M8                                                                  |
| Mounting position                                               | upright (recommended) or either long side                           |
| Max. outer dimensions (incl. terminals/grip handles), l x w x h | 622 x 197 x 355 mm<br>24.5 x 7.8 x 14.0 inch                        |
| Product weight                                                  | 46,7 kg<br>103.0 lb                                                 |
| Shipping weight                                                 | 51.7 kg<br>114.0 lb                                                 |
| Compliance                                                      | CE, E-Mark / RVIA Compliant                                         |

## Technical specifications

|                       |                                                                                                                    |
|-----------------------|--------------------------------------------------------------------------------------------------------------------|
| Battery chemistry     | Lithium iron phosphate                                                                                             |
| Protection degree     | IP65 (electronics cabinet)                                                                                         |
| Parallel connection   | yes, unlimited                                                                                                     |
| Series connection     | yes, up to 10 batteries - systems over 48 V require a separate battery box to prevent access to high voltage parts |
| Protections           | over voltage, under voltage, over temperature                                                                      |
| Safety relay          | to be added mandatorily, product code 7702B-BSS                                                                    |
| Safety relay controls | integrated                                                                                                         |