


**Inverter  
Remote  
Control**

Model  
RC-200

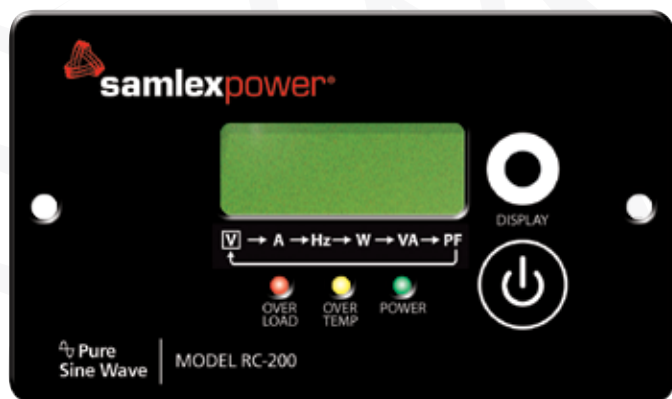

## Design Features

- LCD displays AC Volts, AC Amps, frequency, power (watts), and power factor
- LED Indicators for overload, over temperature and power
- Includes 15' cable
- Sold separately

Optional wired remote control for use with PST Series 1500 and 2000 Watt inverter models.

## 2 YEAR WARRANTY

	MODEL NO.	RC-200
<b>COMPATIBLE INVERTERS</b>	MODEL NUMBERS	PST-1500-12, PST-1500-24 PST-2000-12, PST-2000-24
<b>DISPLAY</b>	LCD DISPLAY	AC Voltage (V), AC Current (A), Frequency (Hz), Active Power (Watts), Apparent Power (VA) and Power Factor (PF)
	LED INDICATORS	Overload, Over Temperature and Power
<b>INPUT / OUTPUT CONNECTION</b>	CABLE SET	RJ-50 (10p10C) with crossed-over / rolled-over connections Length: 4.6 Metres / 15 Feet
<b>ENVIRONMENT</b>	OPERATING TEMPERATURE RANGE	0°C to 40°C / 32°F to 104°F
<b>DIMENSIONS</b>	(W X H X D), MM	110 x 65 x 24.7
	(W X H X D), INCHES	4.33 x 2.56 x 0.97
<b>WEIGHT</b>	WEIGHT WITHOUT CABLE	85 g / 0.04 lbs
	WEIGHT WITH CABLES	256 g / 0.12 lbs