


KRIEGER MANUFACTURING 2016 CORPORATE DR, WILMINGTON, NC 28405

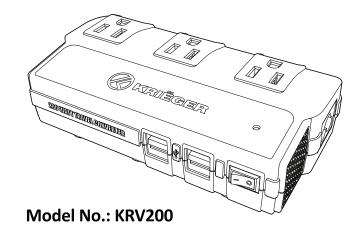

# **200W Travel Adapter & Power Converter**

## Description

The KRIEGER 200W travel adapter & converter is equipped with an AC input cable that works with EU plug styles and includes three additional plug adapters (UK, US and AU) which covers most sockets wordlwide. No matter what country you are in or what the voltage is from 90V to 265VAC, this adapter always supplies 110V ~ 120VAC output voltage, for a maximum wattage of 200W. It includes FOUR USB ports - two 2.4A ports and two 1A ports and with THREE US AC outlets. It is the perfect companion for on-the-go and while travelling.

#### **Features**

- Worldwide compatible: Converts any input voltage (90V ~ 265VAC) to 110V ~ 120 VAC.
- Equipped with three 110V AC outlets, power switch and LED indicator light.
- Four USB ports: DC5V, 6.0A max. Charge four devices simultaneously. The 1A ports are
  designed for general USB devices such as cells phones and the 2.4A for fast charging larger devices
  such as iPads, tablets, smartphones etc.
- Protections: Over-current, over temperature and output short circuit protections.
- The USB outputs are completely isolated from the AC power.
- Adapter size: 6.3" x 3.3" x 1.6" (L\*W\*H), adapter weight: 177oz (11 lbs), portable, compact, fashionable.

### **Specifications**

- Input Voltage: 90V ~ 265VAC, 50/60Hz
- AC Output: 100V ~ 120VAC 60Hz
- AC output power: 200W rated, 230W Max

(Please make sure the total rated power is below 200W)

- USB output: DC 5V / 6.0A max (four USB ports)
- Input cable: three prongs AC input cable with EU plug
- Additional plug adapters: UK, US and AU plug styles
- Protections: Over-current, over temperature and output short circuiting.
- Warranty: 1 year

#### **LED Indications**

- LED is green: AC outlets and USB ports work normally.
- LED is red: Output protection (Over-temperature or Over-loading)
- LED is off: USB Over-loading protection or the connection is loose.