


POWERMAX

PMDP-30/50


THE PMDP-30/50 SERIES IS A 30 AMP OR 50 AMP AC DISTRIBUTION CENTER, AND CAN BE USED WITH ANY OF THE 55A, 60A, 65A OR 75A PM3 DECK MOUNT CONVERTER / CHARGERS. THE PMDP IS AN IDEAL REPLACEMENT FOR WFCO, PD, OR IOTA DISTRIBUTION PANELS.

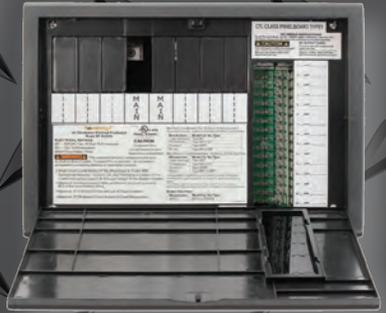

PMDP-30/50-BT

SAME EXCELLENT FEATURES AS THE STANDARD PMDP30/50 WITH

- WIRELESS TECHNOLOGY BUILT-IN
- EASY OPERATION
- HIGH PERFORMANCE
- SAFE AND COST EFFECTIVE
- POLARITY REVERSIBLE FEATURE FOR RV SLIDE OUT MOTORS, AWNINGS AND ELECTRIC JACKS
- 5 ON / OFF CIRCUITS
- 5 MOTORIZED CIRCUITS

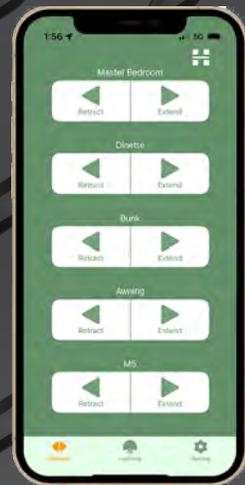

MODEL NUMBER	PMDP-30/50 / PMDP-30/50-BT
INPUT VOLTAGE	110-130 VAC / 240VAC 60 Hz
AC SERVICE	30A or 50A
INPUT BREAKERS	30 A Main + breaker stabs (5 branch circuits) 50 A Main + breaker stabs (12 branch circuits)
DC CIRCUITS	17 (3)-30A and (14)-20A Max
CASE	Black Plastic
DIMENSIONS	13.75"W x 9.5"H x 4"D
WEIGHT	3.75 lbs