


ANALYTIC SYSTEMS

Power Conversion Solutions

AC POWER SUPPLIES

MODEL PWS610 SERIES

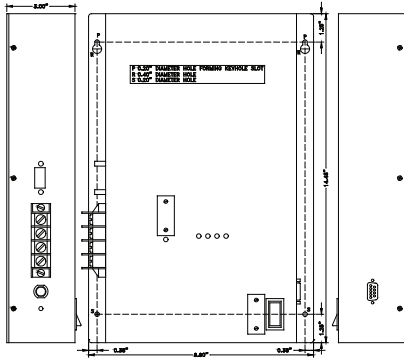

Description

The PWS610 Series of power supplies provides 12, 24 or 48 Volts DC at 600 Watts of continuous power from a 110 or 220 Volt AC source.

Analytic Systems' power supplies use Switchmode technology with powerful IGBT switching transistors for reliability and efficiency with minimum size. Circuit innovations reduce output ripple to levels previously available only from bulky and inefficient linear power supplies. Reliability features include an input fuse, thermal shutdown, current limiting and output short circuit protection with automatic recovery. An Output Over voltage Crowbar circuit protects any powered devices from excessive voltage in the event of a failure of the unit.

The newly updated single-board PWS610 is ultra-quiet and features the latest generation of current mode PWM control. Extra features include adjustable output voltage audible and visual indicators for low input voltage, low output voltage, over temperature, overload and output on. Either 110 or 220 VAC input (Field Convertible) is available. The PWS610 also features a four contact output terminal (two positive and two negative contacts) for easy connection of devices to the supply.

Benefits

- Ultra-Quiet
- Power sensitive electronics without interference
- Rugged & Reliable
- Ensure years of safe and trouble free operation

Design Features

- Adjustable output voltage
- Extremely rugged and well suited for marine and other demanding environments
- Ultra-quiet low EMI operation
- Audible & visual indicators for output overload, low input voltage, low output voltage & over-temperature
- Over-temperature shutdown
- Current limiting
- Short circuit protection
- Output overvoltage crowbar
- Dry contact output fail relay
- Remote control option
- Digital Volt/Ammeter option
- Custom output voltages available
- 19" Rackmount Available
- 3 year parts and labour warranty
- Parallel output diodes available

Applications

- Marine & other rugged environments
- Mobile Offices (TV and Radio Vans)
- Automotive / RV
- Electric Utilities and Substations
- Base Station Power (Radio & Telecommunications)
- Industrial Controls (OEM Applications)
- Field Work / Construction Sites
- Solar / Alternative Power Systems
- Emergency Power Backup (UPS)
- Security Systems
- Product Burn-in Facilities

An ISO9001 and AS9100 Registered Company Battery Chargers • Inverters • Power Supplies • Voltage Converters

8128 River Way, Delta B.C. V4G 1K5 Canada T. 604.946.9981 F. 604.946.9983 TF. 800.668.3884 (US/CANADA)

www.analyticsystems.com

AC POWER SUPPLY

MODEL PWS610 SERIES

Electrical (Input)				
Nominal Vac (ip)	110		220	
Actual (Vac)	90 – 130		180 - 260	
Input Amps (max)	9.8		4.9	
Input Fuse (MDA)	15A		8A	
Input Frequency	45-65 Hz			
Noise on Input	< 50 mV			
Electrical (Output)				
Output Nominal (op)	12	24	48	72
Output Volts (DC)	13.6 ± 0.05	27.2 ± 0.05	54.4 ± 0.1	81.6 ± 0.15
Output Amps	40 cont. / 45 peak	20 cont. / 25 peak	10 cont. / 12.5 peak	6.7 cont. / 8.3 peak
Output Crowbar	16.0 ± 0.5V	32.0 ± 1.0V	63.9 ± 2.0V	96 ± 3.0V
Output Adjustment	± 1.0V			
Output Ripple & Noise	< 50 mV			
Transient Response	< 1V for 50% Surge			
Regulation (Line & Load)	< +/- 0.5%			
Duty Cycle	Peak 20% for 10 min max Continuous 100% for 24 hours per day			
Efficiency	> 80% @ Maximum Output			
EMC	Built to meet FCC Part 15			
Environment Specification				
Operating Temp. Range	-25° to +40°C @ maximum output Derate Linearly 2.5% per °C from 40°C (Optional -40°C extra wide temp. operation avail.)			
Humidity	0 - 95% Relative Humidity (non-condensing) with optional conformal coating			
Audible Noise	NONE Ødb @ 3 ft			
Typical Service Life	> 10 yrs. (87,600 hrs)			
Isolation	Input-Case & Input-Output 1500VDC Output-Case 500VDC (1500VDC @ 48V O/P)			
Mechanical Specification				
Length	13.5 in / 34.3 cm			
Width	19 in / 48.4 cm			
Height	3.5 in / 1.38 cm			
Clearance	1 inch (2.5 cm) all around			
Material	Marine Grade Aluminium			
Finish	Black Anodize / Powder Epoxy Coat			
Fastenings	All 18-8 Stainless Steel			
Weight	12 lb / 5.5 kg			
Connections	Four contact output terminals			
Warranty	3 years			
Safety	Certified to CSA 22.2.107.1 & UL458			

Note: Specifications are subject to change without notice.



ANALYTIC SYSTEMS
Power Conversion Solutions

An ISO9001 and AS9100 Registered Company Battery Chargers • Inverters • Power Supplies • Voltage Converters

8128 River Way, Delta B.C. V4G 1K5 Canada T. 604.946.9981 F. 604.946.9983 TF. 800.668.3884 (US/CANADA)

www.analysissystems.com